



# LAKE RAKE

Instruction Manual



## TABLE OF CONTENTS:

Product Contents .....	2
Important Information .....	2
Assembly Instructions.....	3 - 7
Beach Grooming .....	4
Weed, Algae and Debris Removal... ..	5 - 6
Cast and Retrieve Removal .....	6 - 8

# PRODUCT CONTENTS

## LAKE RAKE:

### IMPORTANT INFORMATION:

The Lake Rake is not to be used as a lifesaving device. Competent adult supervision is required at all times.



### POND & BEACH RAKE

<b>A</b> 1 - Slotted Aluminum Handle	<b>G</b> 2 - Handle Connector
<b>B</b> 1 - Aluminum Handle Extension	<b>H</b> 1 - Handle
<b>C</b> 1 - Rake Head	<b>I</b> 1 - Rope
<b>D</b> 1 - Foam Float	<b>J</b> 2 - 1.5" Bolts with Lock Nuts
<b>E</b> 4 - Float Straps	<b>K</b> 4 - 3/4" Bolts with Lock Nuts
<b>F</b> 2 - Rake Head Braces	

# ASSEMBLY INSTRUCTIONS

## THE RAKE HEAD:

### TOOLS REQUIRED:

- One 7/16" Wrench
- One #2 Phillips Screwdriver



### STEP 1

#### Attach the Rake Head

Identify handle with slotted end (A). Insert rake head (C) into slotted end of handle. Align holes and insert one 1.5" bolt (J), do not overtighten nut. Note: This product is engineered to have a tight fit. Completely tightening nuts before all bolts are inserted may result in improper fitting.



### STEP 2

#### Secure Rake Head

Insert a 1.5" bolt (J) into the second hole on the slotted aluminum handle (A), do not completely tighten nut.



### STEP 3

#### Attach Braces to Rake Head

Align holes of flat end of braces (F) with holes in rake head (C). Insert one 3/4" bolt (K) for each rake head brace (F). Do not completely tighten nuts.



### STEP 4

#### Attach Braces to Handle

Align holes of wrap-around end of braces (F) with handle (A). Ensure one brace is on top of the handle while the second is underneath. Insert two 3/4" bolt (K). Do not completely tighten nuts.




### STEP 5

#### Tighten the Lock Nuts

Once all bolts are inserted, tighten lock nuts, being careful not to overtighten.

# BEACH GROOMING

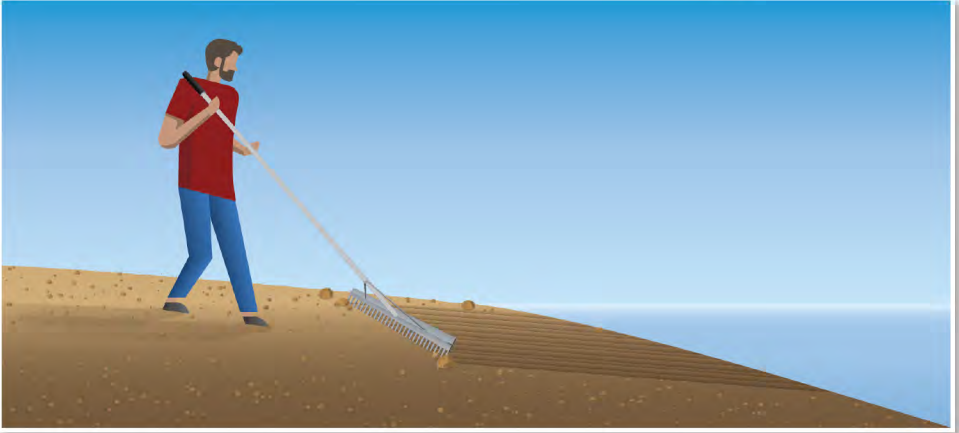

This option is best used for grooming beach sand.

## Preparing the Rake For Grooming:

### PARTS NEEDED


- G** 1 - Handle Connector
- H** 1 - Handle
- L** 1 - Assembled Rake Head



## STEP 1 Attach The Handle

Insert handle connector (G) into the handle (H) by depressing snap button. Insert other end of handle connector (G) into slotted aluminum handle attached to the rake head (L) to secure.

# WEED, ALGAE, & DEBRIS REMOVAL

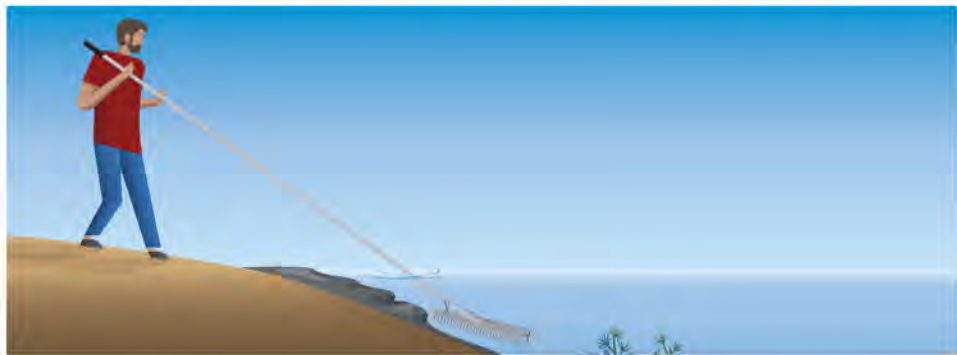

The extended rake option is designed for skimming or removing aquatic weeds, algae or debris from in and around the shoreline.

## Preparing the Rake For Weed and Debris Removal:

### PARTS NEEDED

**B** 1 - Aluminum Handle Extension

**G** 2 - Handle Connector

**H** 1 - Handle

**L** 1 - Assembled Rake Head



### STEP 1

#### Insert the Handle Connector

Depress snap buttons on one end of handle connector (G) and insert into aluminum handle extension (B).

## PREPARE THE RAKE FOR EXTENDED USE:



### STEP 2

#### Connect the Extension

Gripping the slotted aluminum handle attached to the rake head (L), depress snap buttons on other end of handle connector (G) and insert into gripped handle (A), snapping into position.




### STEP 3

#### Attach the Handle

Insert handle connector (G) into the handle (H) by depressing snap button. Insert other end of handle connector (G) into Aluminum Handle Extension (B) to secure.

## CAST & RETRIEVE REMOVAL

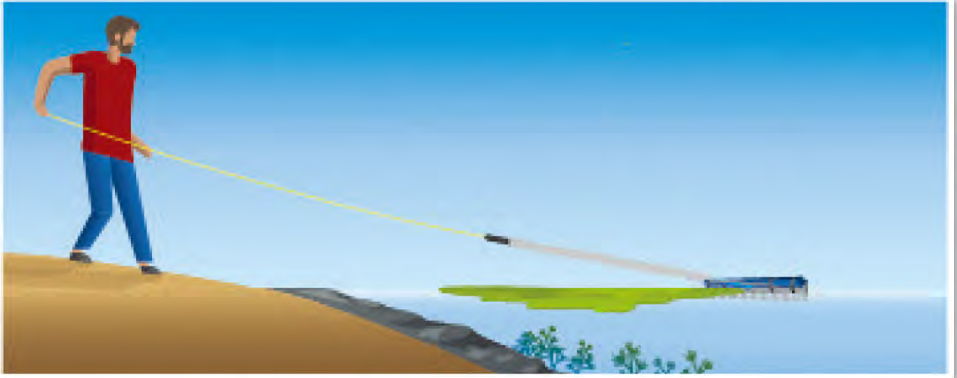

Cast and retrieve option is great for removing floating algae and debris from further into the pond. This option is also perfect for an even more extended reach for aquatic weeds, algae or debris.

# PREPARING THE RAKE FOR CAST AND RETRIEVE USE:

Parts Needed	
<b>D</b>	1 - Foam Float
<b>E</b>	4 - Float Straps
<b>G</b>	1 - Handle Connector
<b>H</b>	1 - Handle
<b>L</b>	1 - Assembled Rake Head



## STEP 1

### Attach the Rope to the Handle

The end of the rope (I) with loop goes through the D-grip (H), then pull the whole rope (I) through the loop.



## STEP 2

### Attach the Handle With Rope

Insert handle connector (G) into the handle with rope (H) by depressing snap button. Insert other end of handle connector (G) into slotted aluminum handle attached to rake head (L) to secure.



## STEP 3

### Attach the Float Depending on Use

If the cast and retrieve method is going to be used for skimming then the float must be attached. To do so, align float (D) on front of assembled rake head (L), as shown. Secure with float straps (E).

## **THANK YOU FOR CHOOSING EVERSROUT**

2630 W Broward Blvd  
Suite 203 - 1661  
Fort Lauderdale, FL 33312-1314

Email: [hello@eversprout.com](mailto:hello@eversprout.com)  
Website: [www.eversprout.com](http://www.eversprout.com)